




POWER
line



IMPIANTI ALL'AVANGUARDIA
CON CONTROLLO REMOTO E L'ANALISI
DELLA PRODUZIONE TRAMITE CLOUD

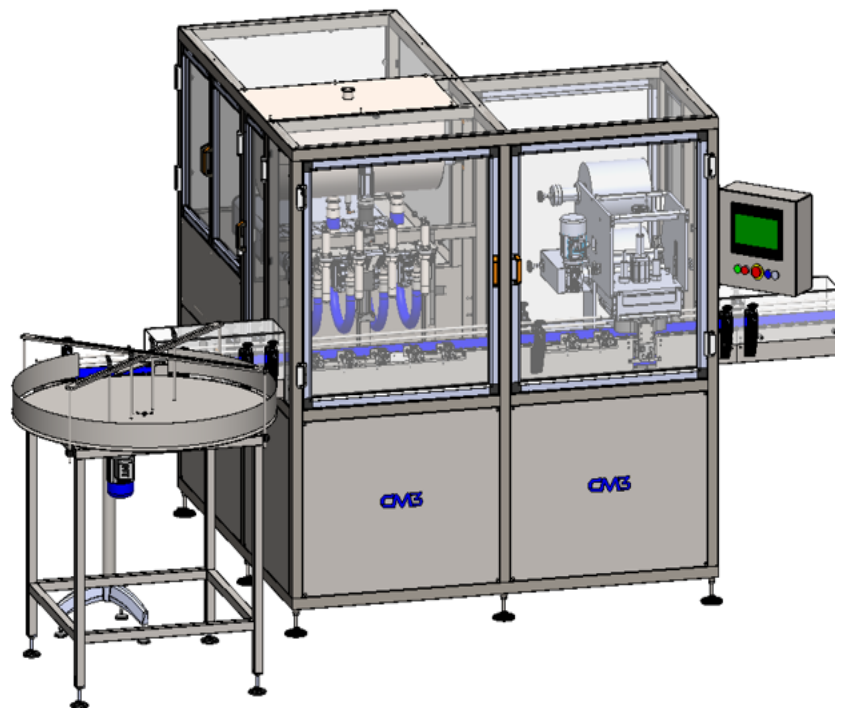

SPECIFICHE TECNICHE

MONOBLOCCO DI RIEMPIMENTO MULTITESTA

GRUPPO DI DOSAGGIO: possibilità d'installare gruppi di dosaggio a 4 o 6 teste con movimentazione tramite servomotore.

Sistemi di dosaggio volumetrici con range:

- da 0 ml a 38 ml
- da 2 ml a 100 ml
- da 5 ml a 250 ml
- da 20 ml a 680 ml
- da 50 ml a 1.300 ml
- da 50 ml a 1.500 ml
- da 80 ml a 2.100 ml
- da 200 ml a 5.000 ml

- Sistemi di dosaggio con pompe e flussimetri tarate in base al progetto (dosaggio fino a 30 lt.)

VELOCITA' DI PRODUZIONE:

- fino a 2.500 pz/h da definire in base al numero di teste e prodotto da trattare

OPTIONAL DISPONIBILI:

- Gruppo di tappatura lineare o rotativo valido per tappi a vite, pressione, twist off
- Gruppo di termosaldatura
- Sistema automatico di carico contenitori
- Soffiavasi
- Tramoggia intermedia di carico prodotto (fino a 200 lt.)
- Integrazione impianto con altre macchine (soffiavasi, metaldetctor, etichettatrice ecc..)
- Teleassistenza

DIMENSIONI IMPIANTO indicative di un gruppo a 4 teste

Larghezza: 5.000 mm
Altezza: 2.800 mm
Profondità: 2.000 mm



Tensione di alimentazione / Supply voltage	400V 3L+N+PE
Frequenza / Frequency	50 Hz
Potenza nominale / Nominal power	2,1 kW
Corrente assorbita / Power consumption	5 A
Peso / Weight	800 Kg
Temperatura di dosaggio / Dosing temperature	Max. 120°
Pressione di esercizio / Pressure	6 bar
Controllo impianto / Control machine	Con pannello touch screen / By touch screen panel

TECHNICAL SPECIFICATIONS

MULTI-HEAD FILLING MONOBLOCK

DOSING GROUP: possibility of installing 4 or 6-head dosing groups with servomotor movement

Volumetric dosing systems with range:

- Pneumatic or electronic volumetric doser range available:

- from 0 ml to 38 ml
- from 2 ml to 100 ml
- from 5 ml to 250 ml
- from 20 ml to 680 ml
- from 50 ml to 1.300 ml
- from 50 ml to 1.500 ml
- from 80 ml to 2.100 ml
- from 200 ml to 5.000 ml

- Dosing systems with pumps and flowmeters calibrated according to the project (dosing up to 30 litres)

PRODUCTION SPEED:

- up to 2,500 pcs/h to be defined based on the number of heads and product to be treated

OPTIONAL AVAILABLE: system upgrade to full automatic version

- Linear or rotary capping group valid for screw, pressure, twist off caps

- Heat sealing group

- Automatic container loading system

- Blowing vases

- Intermediate product loading hopper (up to 200 litres)

- System integration with other machines (vase blower, metal detector, labeller, etc.)

- Remote assistance

MACHINE DIMENSION indicative of a 4-headed group

Length: 5.000mm
Height: 2.800mm
Depth: 2.000 mm



— ENGINEERING —



Via Prà Bordoni, 46 - Zanè - 36010 (VI)



T. 0445 060050



cm3@cm3engineering.com



www.cm3engineering.com



linkedin.com/company/cm3-engineering



facebook.com/cm3.engineering

